


# REPAIRS FOR NO. 33 MILLS

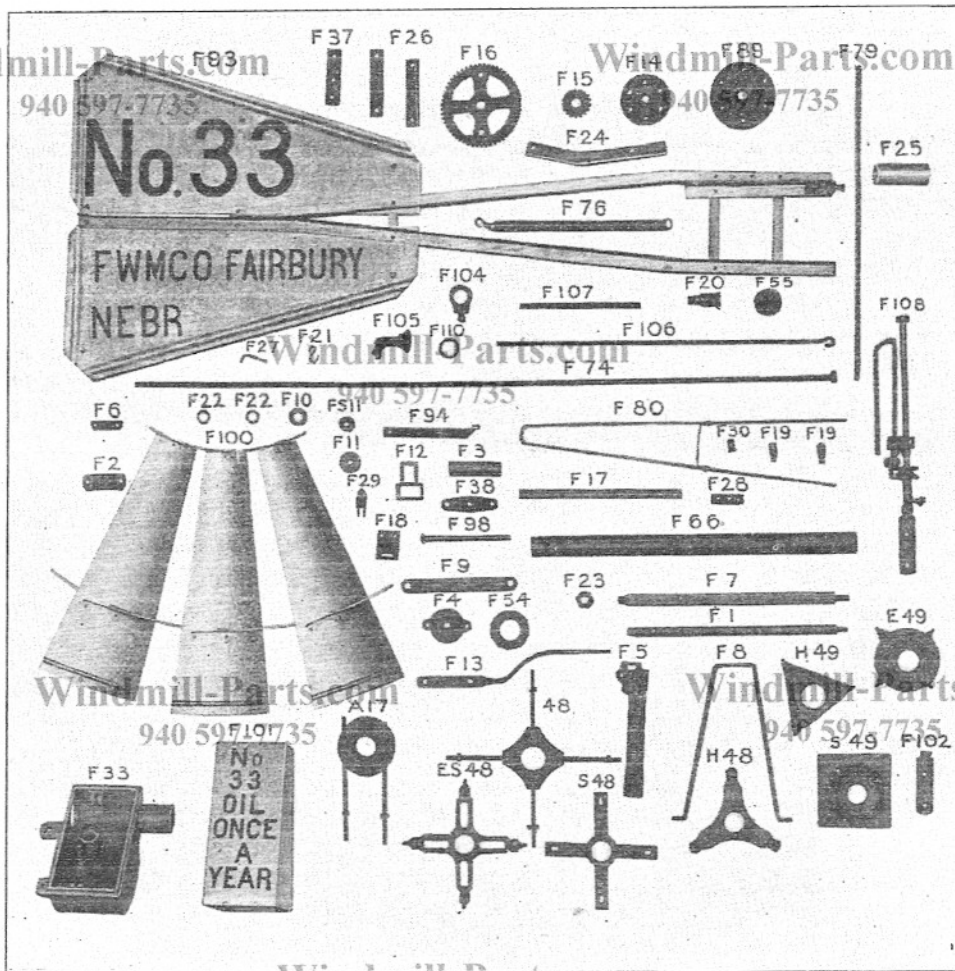

Windmill-Parts.com  
940 597-7735

PART NO.	NAME	6 Ft. No. 33	8 Ft. No. 33	PART NO.	NAME	6 Ft. No. 33	8 Ft. No. 33
F 1	Wheel shaft	\$1.75	\$2.00	38	Tower cap clamp	.20	.20
F 2	Clamp for pipe to frame	.80	.80	48	Wood tower storm stay	1.50	1.50
F 3	Front wheel shaft (bronze bearing)	1.25	1.35	ES 48	Combination steel and wood storm stay	1.50	1.50
F 4	Back wheel shaft bearing with plate	1.20	1.30	S 48	Fairbury steel tower storm stay	1.50	1.50
	Bearing only for F 4	.60	.65	H 48	Three post steel storm stay	1.50	1.50
F 5	Slide-head	2.40	2.40	E 49	Combination steel and wood tower cap	1.50	1.50
F 6	Cross head swivel clamp	.25	.25	S 49	Fairbury steel tower cap	1.50	1.50
F 7	Square guide bar	1.40	1.40	H 49	Three post tower cap	1.50	1.50
F 8	Square guide bar brace	.75	.85	F 53	Split-type B.B. turn table for 2" mast pipe	2.50	2.50
F 9	Pitman	.80	.80	F 54	B.B. turn table "K" Type	1.60	1.60
F 10	Oil retaining washer	.10	.10		Ball retainer for "K" B.B. turn table	.30	.30
F 11	Large sheave	.40	.40	F 55	Lower guide	.70	.70
FS 11	Small sheave	.40	.40	F 66	2-inch mast pipe	1.60	1.60
F 12	Sheave guard	.50	.50	F 74	Piston rod	.80	1.00
F 13	Brake lever	.50	.60	F 76	Regulating spring	.80	.90
F 14	Small spider	.70	.75	F 79	Pull-out chain	.45	.45
F 15	Pinion	1.90	2.00	F 80	Wheel arm	.65	.90
F 16	Gear	3.50	4.00	F 89	Large wheel spider	1.25	1.70
A 17	Eclipse wood tower cap	1.50	1.50	F 93	Complete vane	5.00	7.00
F 17	Brake band	.50	.60	F 94	Spring bar	.30	.30
F 18	Brake adjusting casting	.40	.49	F 98	Vane hinge pin	.40	.50
F 19	Crank pin	.60	.60	F 100	Wheel section	1.75	2.45
F 19	Wrist pin	.60	.60	F 101	Hood over engine	1.70	2.00
F 20	Gear bearing pin	1.10	1.20	F 102	Wood rod connection	.60	.60
F 21	S-Hook	.10	.10	F 104	Upper end of pull-out swivel	.50	.50
F 22	Crank pin washer	.10	.10	F 105	Lower end of pull-out swivel	.60	.60
F 22	Wrist pin washer	.10	.10	F 106	Pull-out rod	.50	.50
F 23	Nut for gear bearing pin	.10	.10	F 107	Stop bar for pull-out swivel	.25	.25
F 24	Bumper angle iron for Vane	.25	.25	F 108	Complete pull-out less mast pipe	5.00	5.00
F 25	Oil splash resisting tube	.25	.25	F'10	Small pull-out ball race	.30	.30
F 26	Splice irons (2 pieces)	.30	.30		Pull-out chain, per foot	.12	.12
F 27	Sheave pin	.10	.10		Steel Blades for section	.50	.60
F 28	Bumper casting	.25	.25		Small wheel clips	.05	.05
F 29	Brake shock absorber	.40	.40		Large wheel clips	.10	.10
F 30	Bumper spring and casting	.40	.40		1/2" steel balls, each	.025	.025
F 33	Main frame	4.50	6.00		3/8"x1" galv. bolts	.04	.04
F 37	Pump to rod connection	.60	.60				