


# REPAIR LIST FOR SELF OILING WINDMILLS

## 6½-foot B, 8-Foot C, 10-Foot D

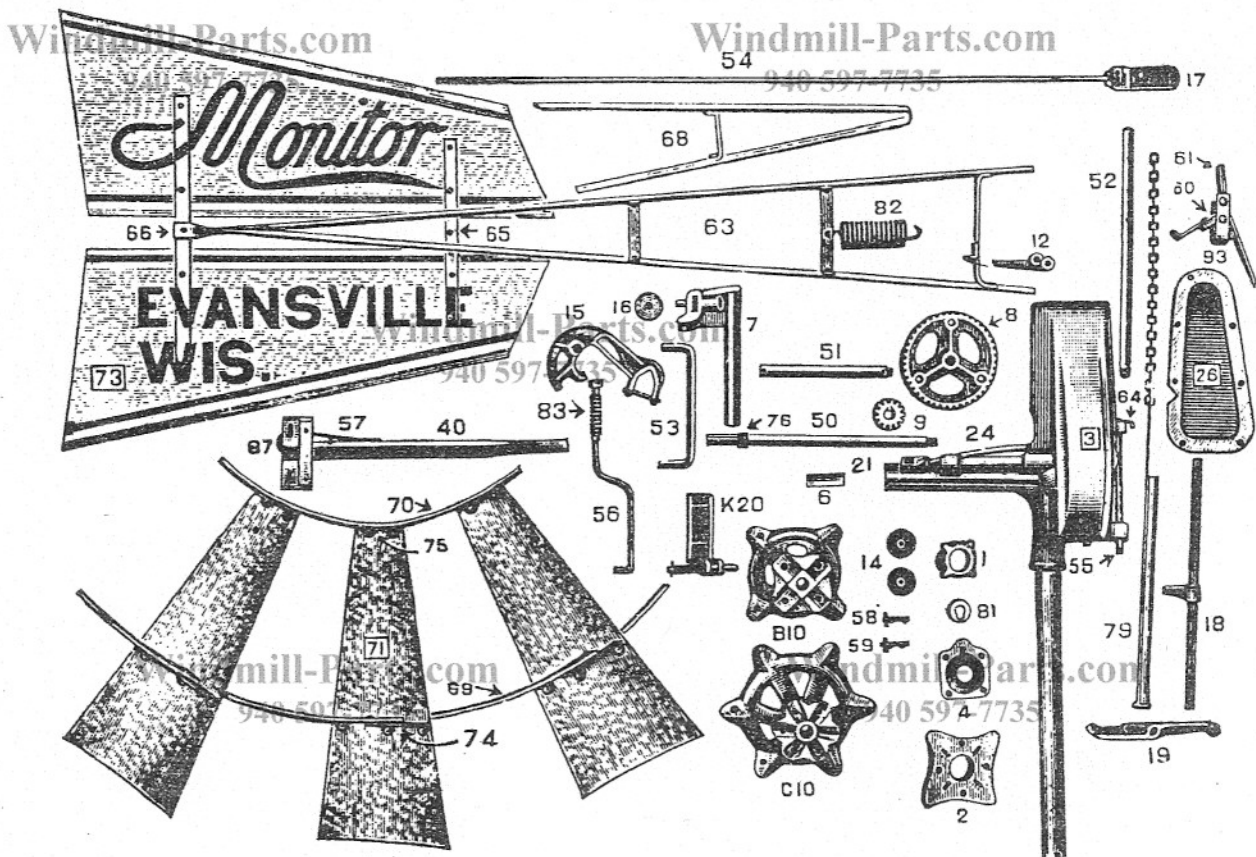

Windmill-Parts.com

In ordering repair parts give both name and symbol.

Name of Part	6½-Foot B				8-Foot C				10-Foot D			
	Sym- bol	Price	Weight		Sym- bol	Price	Weight		Sym- bol	Price	Weight	
			Lb.	Oz.			Lb.	Oz.			Lb.	Oz.
Top tower casting, 4-post. . .	B1	\$ .80	1	8	C1	\$ .80	2	3	C1	\$ .80	2	3
Bushing for top casting 2" . .	B1½	.80										
Lower tower casting, 4-post . .	B2	2.35	4		C2	3.50	6	8	J2A	2.60	9	8
Lower tower casting, 3-post . .	3B2	2.00	3	8	3K2	1.20	2	6	3J2		3	3
Bottom turntable cup . . . . .	B4	1.40	1	13	C4	2.00	3		C4	2.00	3	
Bushing for main casting . . . .	WB6	.35		3	WC6	.65		5	D6	2.00		8
Cross head with pin . . . . .	B7	4.20	3		C7	6.55	7	8	D7	8.50	10	5
Crank gear only . . . . .	B8	5.85	5		C8	7.70	11		D8	10.30	18	
Pinion . . . . .	B9	2.60	1		C9	3.30	2	8	D9	3.85	5	
Wheel hub with shaft . . . . .	B10	10.40	11	8	C10	13.40	18		D10	24.20	38	
(Wheel hub and shaft always furnished assembled. Can- not be furnished separately.)												
Brake rod lever . . . . .	B12	.80		8	C12	.80		13	D12	1.50	1	
Bearing casting for bumper . .	B13	.80		6	C13	.80		6	D13	1.20		8
Sheave . . . . .	B14	.80		6	E14	.80		10	D14	1.20	1	8
Brake casting only . . . . .	B15	2.35	3		C15	2.70	4	5	D15	5.40	8	8

Name of Part	6½-Foot B				8-Foot C				10-Foot D			
	Sym- bol	Price	Weight		Sym- bol	Price	Weight		Sym- bol	Price	Weight	
			Lb.	Oz.			Lb.	Oz.			Lb.	Oz.
Cross head roller. . . . .	B16	\$.80		13	C16	\$.80		13	D16	\$1.20	1	6
P. Pole Socket, Clip & Bolt .	B17	1.05	1	8	C17	1.20	2	8	D17	1.50	2	2
Swivel slide . . . . .	B18	1.20	1	8	K18	1.40	2	8	J18	1.75	2	8
Guide for swivel slide, 4 p. .	B19	1.20	1	8	K19	1.20	2	8	J19	1.50	3	8
Guide for swivel slide, 3 p. .	3B19	.80	1	8	3K19	.80	1	2	3J19	1.20	1	5
Oil pipe saddle. . . . .	B21	.80		2	C21	.80		8	D21			8
Filler and drain plugs, each .	B22			3	C22			3	D22	.25		3
Filler elbow . . . . .					C23	.70		8	D23			8
Oil pipe. . . . .	B24	.70		5	C24			5	D24			8
Crank case cover. . . . .	B46	2.00	1	13	C46	2.70	3		D46		3	5
Crank case cover gasket. . . .	B47			2	C47	.80		2	D47	.80		2
Shaft for gear. . . . .	B51	1.75	1	11	C51	2.35	3	3	D51	3.85	6	13
Guide shaft for cross head . .	B52	2.00	2	8	C52	2.90	6		D52	5.85	9	5
Pitman . . . . .	B53	1.75	1	8	C53	2.70	3	13	D53	7.70	6	6
Piston rod only. . . . .	B54	2.00	3	5	C54	2.35	5		D54	3.50	6	11
Vane hinge with pin lock. . . .	B55	1.05		13	C55	1.50	1	8	D55	2.00	2	6
Brake rod with pin . . . . .	B56	1.40	1	5	C56	2.00	2		D56	3.85	3	5
Sheave pin, short. . . . .	B58	.25		2	C58	.25		2	D58	.25		3
Sheave pin, long . . . . .	B59	.25		2	C59	.25		2	D59	.35		3
Spring clevis . . . . .	B60	.70		3	C60	.70		5	D60	.80		8
Spring extension . . . . .	B61	.70		3	C61	.70		5	D61	.80		5
Bent pin for K20 . . . . .	WC61	.35		5	WC61	.35		5	WC61	.35		6
Spring arm pin . . . . .	B62			2	C62			2	D62			2
Vane support only . . . . .	B63	7.70	9		C63		16		D63		31	
Vane hinge pin lock . . . . .	B64	.35		2	C64		2		D64	.35		2
Vane rib, short . . . . .	E65			13	E65			13	J65			1
Vane rib, medium. . . . .					E66		1	2	J66			2
Vane rib, long . . . . .	E66		1	2	E67		1	6	J67			2
Wheel spoke . . . . .	B68	1.50	2	8	C68	2.00	3	13	J68	3.85	5	
Outer rim . . . . .	B69			3	E69	1.20	2	5	J69			5
Inner rim . . . . .	B70			1	E70	.80	3	8	J70	1.20	5	5
Sail with clips . . . . .	WB71	1.10	2	3	WC71	1.40	3	8	WD71	2.60	5	5
Vane sheet upper. . . . .	B72			3	E72		5	5	J72		9	5
Vane sheet lower. . . . .	B73			3	E73		5	5	J73		9	5
Sail clip, large . . . . .	WC74	.25		3	WC74	.25		3	WD74	.35		6
Sail clip, small. . . . .	WC75	.15		2	WC75	.15		2	WD75	.35		3
Threaded oil collar . . . . .	WB76	.15		2	WC76	.25		2	D76	1.20		2
Swivel complete . . . . .	B79	4.40	1	10	C79	5.40	3		D79	7.00	3	13
Turntable cone . . . . .	B81	1.50		8	C81	1.50	1		J81	1.50	1	
Governor spring . . . . .	B82	2.00	1	5	C82	3.05	5	10	D82	5.40	5	10
Brake spring . . . . .	B83	.70		5	C83	.95		8	D83	1.20	1	
Chain for swivel . . . . .	B85	.80		3	C85	1.05		10	D85			11
Spring for K20 . . . . .	WC88	.35		2	WC88	.35		2	WC88	.35		2
Cap for gear shaft bearing . .	B89	.25		8	C89			13	D89			1
Gear shaft pin . . . . .	B90	.35		2	C90	.35		2	D90			2
Brake pin . . . . .	B91	.35		2	C91			2	D91	.35		2
Vane bumper only . . . . .	B93	1.20		14	C93	1.75	1	5	D93			2
Vane bumper, assembled . . .		3.50	2			4.10	2			2.35	2	
Pump Coupler-Assembly. . . .	WC120	1.60		2	WC120	1.60		2	WC120	1.60		2
One section complete . . . . .	WB501-1	6.10	11		WC501-1	6.50	13		WD501-1	13.25	23	
Set of steel turntable balls . .		1.05				1.20				1.20		